

# Poseidon2 3266

## LAN device for remote sensors monitoring




Poseidon2 3266 is a base unit for remote LAN sensors monitoring.

Monitors up to 8 external sensors and 4 detectors (smoke detection, etc.)

Logs measured values into its internal memory.

Alerts via e-mail. Supports SNMP and Modbus/TCP.

Poseidon2 3266 can be connected to the SensDesk.com online portal for remote monitoring.

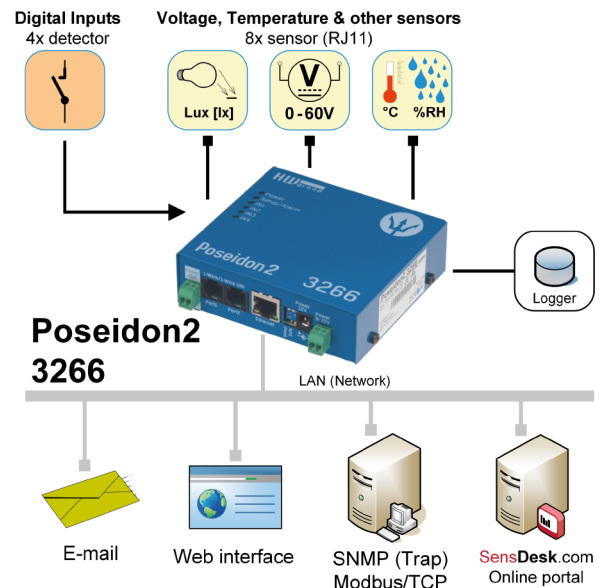

## Usage examples

### Remote monitoring in IT

Device can monitor power supply, door contacts, temperature and humidity sensors and other sensors.

### Temperature measurement in refrigerators and freezers

Monitors storage conditions. Application software then allows creating HACCP protocols.

### Industrial sensors

Remote monitoring of connected door contacts, 0-10V and 4-20mA sensors and Pt-100 or Pt-1000 probes.

### CCTV systems

Sensor values and detectors states can be connected to IP camera systems from several manufacturers.

### Air condition monitoring

Detects air conditioning outtages, power supply outtages, refrigerant leaks and temperature spikes.

- ✓ Up to 8 external sensors (RJ11)
- ✓ 4x digital inputs for detectors
- ✓ Datalogger (250 000 records)
- ✓ SNMP and Modbus/TCP
- ✓ Can be connected to SensDesk.com
- ✓ E-mail alerts

## Basic features

- Built-in web server for configuration.
- Can be mounted to a wall or to a DIN rail.
- Alarms can be sent as SMS messages using remote "HWg-SMS-GW" connected to the same network. Does not need any additional software.
- Alarms can be sent to 5 different email addresses and 5 phone numbers.
- Can be used in more than 50 3<sup>rd</sup> party software applications (SNMP, SCADA nad more).
- Support for programmers - HWg-SDK.
- Compatible with HWg-Trigger and HWg-PDMS applications.
- Mobile application for Android and Apple products.

## Poseidon2 3266


Digital Inputs	4
Sensors	
1-Wire / 1-Wire UNI (2x 60m)	8
SMS-GW client	✓
Modbus/TCP	✓
Logger	250,000 records
SNMP	✓
E-mail alarms (periodical)	✓
HWg-Push	✓

## Compatible sensors

Current and voltage measuring	✓
Temperature (internal and external) measurement	✓
Temperature measurement with Pt100 (converter for external probe)	✓
Light sensors	✓
Water leak detection (spot)	✓
Water leak detection in an area with a detection cable (WLD)	✓
Smoke detectors	✓
Door contacts	✓
Power supply outage detection (110/230V)	✓

## Physical characteristics

Dimensions	100 x 94 x 25 mm
Supply	9-30 V
Temperature/humidity	-30 to 85°C 20-80% R.H.

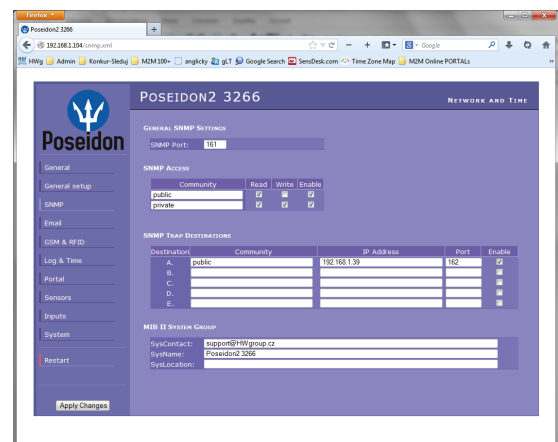

## Optional accessories



30A Current probe 1W-UNI



Expander 4xDI 1W-UNI



HTemp-1Wire Outdoor 3m



Door contact



Sensor WLD Relay 1W-UNI

<b>Poseidon2 3266</b>	Poseidon2 3266 unit with no accessories.
<b>Poseidon2 3266 Tset</b>	Set contains Poseidon2 3266, power adapter and a Temp-1Wire IP67 3m temperature probe.
<b>Poseidon2 3266 THset</b>	Set contains Poseidon2 3266, power adapter and a HTemp-1Wire 3m combined...probe.
<b>PowerEgg</b>	External unit to detect and control 230 V mains voltage.
<b>Converter 2xPt100 1W-UNI</b>	Converter to connect two PT100 probes.
<b>30A Current probe 1W-UNI</b>	Current probe, 0–30A AC. Line wire runs through the measuring coil (can be opened).